




the future is safer with altro


altro

Altro Marine™ 20 / Altro T20


Safety Flooring / Suelos de Seguridad / Sicherheitsbodenbelag



Steam IPT20807
WR85 / A1M85 / LRV 37



Rainfall IPT20810
WR135 / A1M135 / LRV 43



Cascade IPT20809
WR105 / A1M1 / LRV 71




Gull T20813
WR79 / A1M191 / LRV 46




Marlin T20811
WR203 / A1M203 / LRV 34




Reef T20801
WR20 / A1M20 / LRV 41



Shark IPT20812
WR201 / A1M84 / LRV 24



Tide IPT20808
WR71 / A1M71 / LRV 21



Seagrass IPT20814
WR137 / A1M137 / LRV 37



Altro White Rock™ is frequently specified to complement Altro Marine for shower/wet areas.


Altro White Rock™ está recomendada para complementar Altro T20 en las duchas y zonas húmedas.

Zusammen mit Altro Marine wird häufig Altro White Rock™ ausgeschrieben um ein fugenloses Bild für Duschen und Nassbereiche zu schaffen.

The complete hygienic flooring & walling solution.

La gama más completa de suelos y revestimientos higiénicos.

Die hygienische Systemlösung für Wand und Boden



Fen IPT20815
WR242 / A1M242 / LRV 19

Light Reflectance Values measured in accordance with BS8493:2008. Exact material match with samples cannot be guaranteed. No podemos garantizar que el material del suelo de seguridad coincida exactamente con el de las muestras. Eine exakte Übereinstimmung des Materials mit Mustern kann nicht garantiert werden.

Codes: **WR** = weld rod, **A1M** = mastic, **LRV** = light reflectance value.
Códigos: **WR** = Cordón de soldadura, **A1M** = Mástique, **LRV** = Valor de Reflectancia de la Luz.
Abkürzungen: **WR** = Schweißschnüre, **A1M** = Altro Mastic Dichtmasse, **LRV** = Lichtreflexionswert



Altro is the first safety flooring manufacturer to recycle traditional safety flooring in-house

A+ BRE Generic Green Guide Rating for Safety Flooring, full details available at www.thegreenguide.org.uk

Flooring Type Tipo de pavimento Belagsart		EN 13845/ EN 13553	Safety flooring Suelo de seguridad antideslizante Sicherheitsbodenbelag
Classification For Use Areas de uso Einsatzbereiche		EN 685	34 & 43 34 y 43 34 & 43
Slip Resistance Resistencia al deslizamiento Rutschsicherheit*		EN 13845 EN 13893 DIN 51130 / DIN 51097	Esb DS R10 / Class C
Thickness Espesor Total Gesamtdicke		EN 428	2 mm
Wear Layer Capa de uso Nutzschicht		EN 429	2.0mm
Flexibility Flexibilidad Flexibilität		EN 435	Pass Conforme bestanden
Weight Peso Flächengewicht		EN 430	2.5 kg/m ² 2.5 kg/m ² 2.5 kg/m ²
Roll Dimensions Dimensiones del rollo Rollenabmessungen		EN 426	2 m x 20 m = 40 m ²
Light Fastness Resistencia a la luz Lichtechtheit		EN 20105-B02	≥6
Sound Insulation Aislamiento acústico Trittschal		ISO 140-8	13 dB
Wear Resistance Abrasión Verschleißverhalten		EN660-2 EN13845	Group T / Grupo T / Gruppe T
Indentation Punzonamiento Resteindruck		EN 433	≤0.10mm
Fire Performance Reacción al fuego Brandverhalten		EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class Bfl-s1 ≥ 8kW/m ² Pass Clase Bfl-s1 ≥ 8kW/m ² Conforme Klasse Bfl-s1 ≥ 8kW/m ² , bestanden
Chemical Resistance Resistencia a los productos químicos Chemikalieneinwirkung**		EN 423	Good Buena beständig
Castor Chair Abrasion Huellas de sillas de ruedas Stuhlrollenbeanspruchung		EN 425	Pass Conforme geeignet
Under Floor Heating Calefacción por el suelo Fußbodenheizung		EN 12667	Suitable Apto geeignet
Electrical Behaviours Características eléctricas Elektrisches Verhalten		EN1815	≤ 2 kV Antistatic ≤ 2kV Antiestáticas ≤ 2kV antistatisch
VOC Emissions Emisiones de VOC VOC Emissionen		prEN 15052 Section 01350 AgBB/DiBt	Low/Pass/Approved Baja/Conforme/Aprobado gering/geeignet/zugelassen

This product has never contained phthalate plasticisers. Contains Bacteriostat.

* We recommend the use of Altro Aquarius™ for combined shoe and barefoot use in wet and dry areas such as hospital bathrooms and Altro Marine™ 20 / T20 for barefoot use in wet areas such as swimming pool surrounds.


** Caution Ketone/Aromatic Solvents. Please contact Altro for further technical advice regarding staining and chemical resistance. Certain chemicals may cause staining of vinyl. Traffic stain can be caused by oil residue, certain cleaning agents, asphalt and anti-oxidants in some types of rubber.

Installation and Maintenance

All installations in accordance with Altro safety flooring instructions and Local Codes of Practice. Please refer to Altro Cleaning Card for maintenance advice. Failure to install and maintain Altro flooring in accordance with installation instructions can affect its performance and slip resistance. Floors should be protected from other trades and thoroughly cleaned before handover.

All information is correct at the time of print and is subject to change without prior notice.

Visit us at www.altro.com for more information and updates.

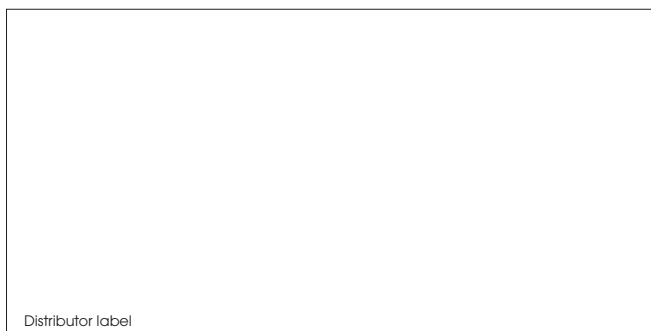

Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.



For further technical information please visit www.altro.com
Si desea obtener más información técnica, visite www.altroscandess.com
Weitere technische Informationen finden Sie auf unserer Website www.altro.de

Manufactured by:
Altro Ltd, Works Road
Letchworth Garden City
SG6 1NW, United Kingdom

EN13845